




618 FASTENERS INSERTION
PRESS

618 FASTENERS INSERTION PRESS

Approv. Dir.
CERTIFICATED COMPANY UNI EN ISO
9001:2015 REG.3023/A

618 FASTENERS INSERTION PRESS

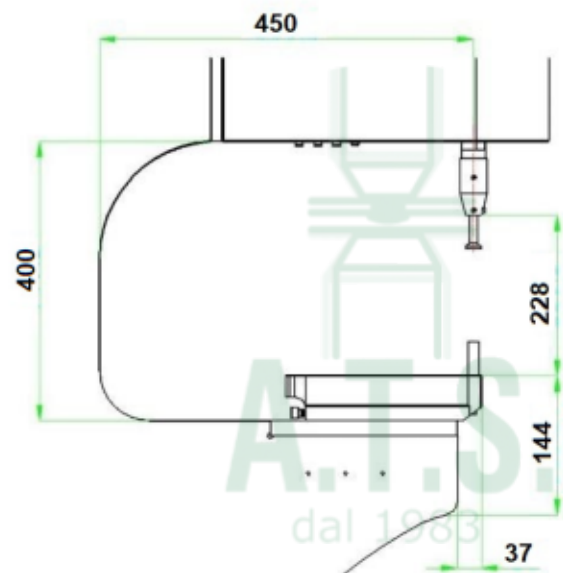

Groove depth	450 mm
Groove Max height	400 mm
Punch stroke	200 mm
Upper punch approach speed	Less than 30 mm / sec
Anti-crush protection system (Fingers and hands)	Standard
Max pressure	53 kN (6T)
Upper deadend	10 mm – 200 mm
Driving system	idraulico
Repetition precision of pression set up	±1%
Display for piece positioning	Optional Laser
Dimensions (mm)	H x L x D 2000 - 1000 - 1000
Working table height	Da 970 a 1050 mm Adjustable
Gross weight	500 Kg
input supply voltage	2.2 kW three phase 380V